

T-Bar Lumo 1195mm x 295mm x 10mm

PANEL



Product Code

MP23

RoHS

CE

Technical Description

The ultimate efficiency upgrade

- Available in four product variants: 1195mm x 595mm, 595mm x 595mm, 1195mm x 295mm and Micro Prismatic 1195mm x 295mm
- Symmetric beam spread with a beam angle of 115°
- UV stable PMMA light guiding plate prevents dis-colouring over time
- Highly efficient >100lm/W on average
- If you require a customised version of this product, please [contact us](#)

Electrical Specifications


System Power	32W, 40W, 50W
Input Voltage	240V
Control Type	ON/OFF, 0-10V, Phase-Cut, DALI, Casambi
System Efficacy (max.)	106lm/W

Physical Characteristics

Installation Method	Fixed Recessed
Trim Finish	White
Custom Dimming Type	Available on request
IP Rating / IK Rating	IP20

Photometric Info

Luminaire Lumens	3400lm, 4200lm, 5000lm
CRI	CRi80
CCT	3000K, 4000K
Beam Angle	115°

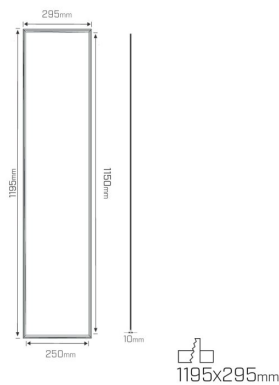

Polar Distribution Diagrams

