

Capella Smooth

DOWNLIGHT

Product Code

MD08



Technical Description

Architectural elegance

- Efficacy of up to 79lm/W at CRI80
- Beam angle options: 24°, 35°, 60°
- Capella Edge option also available
- Dimmability: Non-Dim, Phase-Cut
- Comes with IP40 protection
- If you require a customised version of this product, please [contact us](#).

Electrical Specifications


System Power	9.5W, 13.5W
Control Type	Phase-Cut Dimmable, DALI Dimmable, Non-Dimmable
System Efficacy (max.)	79lm/W

Physical Characteristics

Installation Method	Fixed Recessed
Trim Finish	White, Black
Custom Dimming Type	Available on request
IP Rating / IK Rating	IP40


Photometric Info

Luminaire Lumens	750lm, 950lm
CRI	CRI90
CCT	2700K, 3000K, 4000K
Beam Angle	24°, 35°, 60°




Polar Distribution Diagrams

Capella Smooth 60°

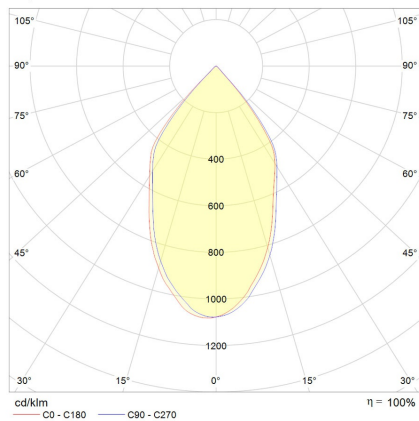

Capella Smooth 36°

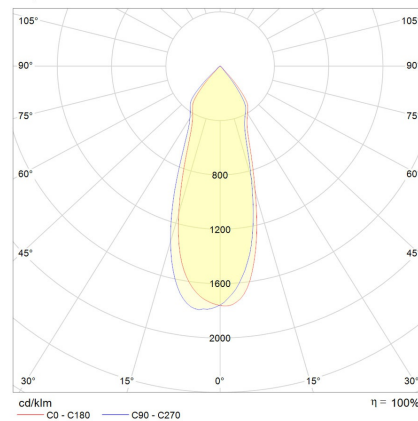

Capella Smooth 24°

