


# Mons-C

## TRUNKING SYSTEMS

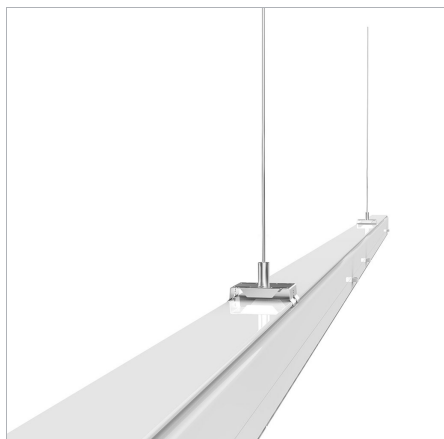

### Product Code

MR15



### Technical Description

#### Trunking Redefined

- Highly energy efficient LED Trunking System with efficacy of up to 153lm/W at CRI80
- Pre-wired with 5 wires, 7 or 11 wires available
- Multiple beam angle options of 24°, 45°, 90°, Single Asymmetric (25°), Double Asymmetric (25°)
- Amazing add-on features: Emergency/Sensor/Dimming/Track modules
- Easy installation: simply click to connect multiple, pre-wired lengths together
- Ideal for supermarket aisles, retail and commercial lighting
- If you require a customised version of this product, please [contact us](#).

### Electrical Specifications


|                        |  |
|------------------------|--|
| System Power           | 16W, 20W, 26W, 32W, 40W, 50W, 65W, 80W |
| Input Voltage          | 240V                                   |
| Control Type           | Non-Dimmable                           |
| System Efficacy (max.) | 165lm/W                                |

### Physical Characteristics


|                     |                             |
|---------------------|-----------------------------|
| Installation Method | Surface Mounted / Suspended |
| Trim Finish         | White                       |
| Length              | 567mm, 1410mm               |
| Weight              | 4.2KgsKgs                   |

### Photometric Info

|                  |  |
|------------------|--|
| Luminaire Lumens | 5000lm, 6600lm, 2400lm, 3100lm, 4100lm, 8000lm, 10200lm, 12200lm               |
| CRI              | CRI80  |
| CCT              | 4000K  |
| Beam Angle       | 1x25° Left Asymmetric, 1x25° Right Asymmetric, 24°, 2x25° Asymmetric, 45°, 90° |

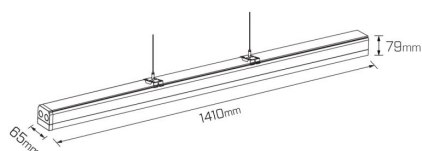


Note: Drawing not to scale

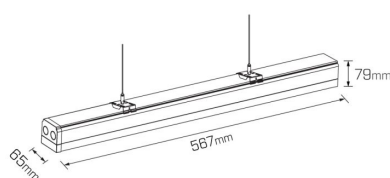


Note: Drawing not to scale

### Polar Distribution Diagrams


Mons-C 90°

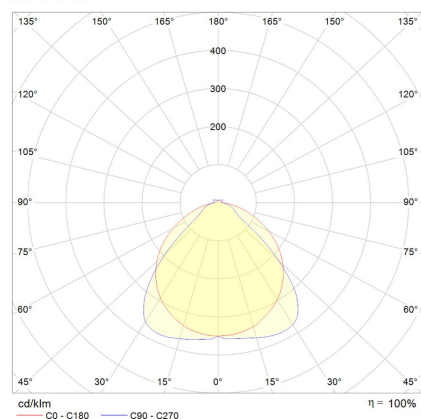

Mons-C 45°

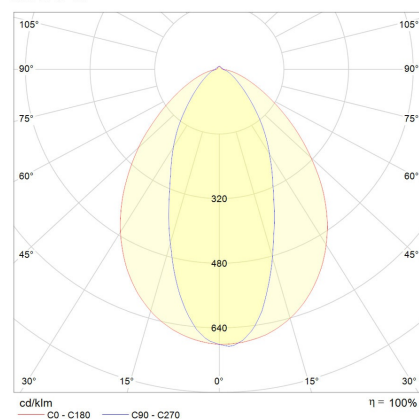


Mons-C 2 x 25°

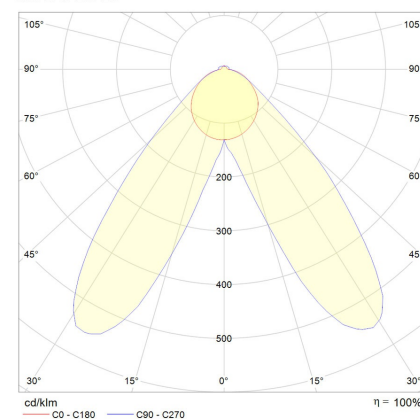

## Mons-C

## TRUNKING SYSTEMS

Mons-C 24°

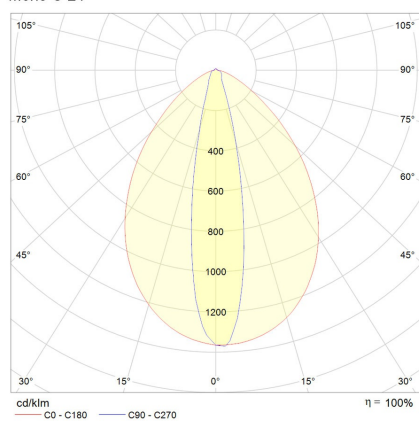

Mons-C 1 x 25°

