

Benson Adjustable

DOWNLIGHT

Product Code

MD07AR



Technical Description

The popular choice...the right size

- Beam angle options: 24°, 35°, 60°
- Available in both fixed and adjustable recessed installations
- Maximum tilt angle of 35°
- Both warm and natural white temperature options available
- Comes with IP40 protection
- If you require a customised version of this product, please [contact us](#)

Electrical Specifications


System Power	9.5W, 13.5W
Input Voltage	240V
Control Type	ON/OFF, Phase-Cut, DALI
System Efficacy (max.)	69lm/W
Power Factor	> 0.9

Physical Characteristics

Installation Method	Adjustable Recessed
Trim Finish	White, Black
IP Rating / IK Rating	IP40
Maximum Tilt Angle	30°


Photometric Info

Luminaire Lumens	660lm, 840lm
CRI	CRI90
CCT	2700K, 3000K, 4000K
Beam Angle	24°, 36°, 60°
Lumen Maintenance	> 50, 000hrs (L70 B10)
MacAdam Step	3 Step




Polar Distribution Diagrams

Benson 61°

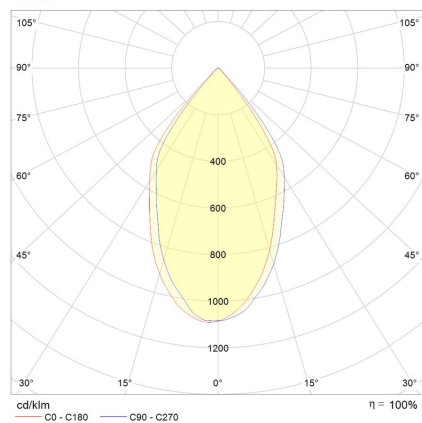

Benson 35°

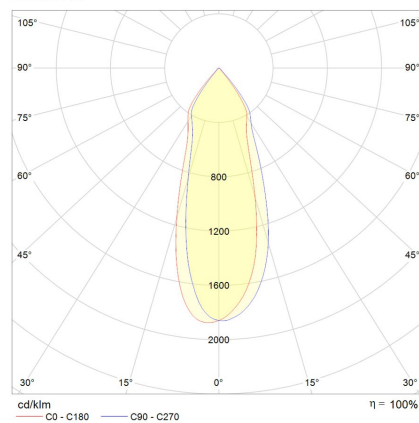

Benson 24°

