

Venice Mini Surface Mounted

DOWNLIGHT

Product Code

MD04SM



RoHS

Technical Description

Downright standout

- Make a design statement with this surface mounted version of the Venice Mini Spotlight
- High efficacy at >90lm/W
- Maximum efficiency with 100% LOR
- Suitable for residential and architectural lighting applications

Electrical Specifications


System Power	20W, 28W
Input Voltage	240V
Control Type	ON/OFF, Phase-Cut, 0-10V, DALI, Casambi
System Efficacy (max.)	90lm/W
Power Factor	>0.9

Photometric Info

Luminaire Lumens	1800lm, 2430lm
CRI	CRi90, CRi97+
CCT	2700K, 3000K, 3000K ComfoLED, 3000K Vivid, 3500K, 4000K, 4000K ComfoLED
Beam Angle	14°, 20°, 42°
Lumen Maintenance	>65000hrs (L70B10)
MacAdam Step	3 Step


Physical Characteristics

Installation Method	Surface Mounted
Trim Finish	White, Black
Custom Dimming Type	Available on request
IP Rating / IK Rating	IP20
Weight	0.9Kgs
Fitting Material	Aluminium




Polar Distribution Diagrams

Venice Mini 40°

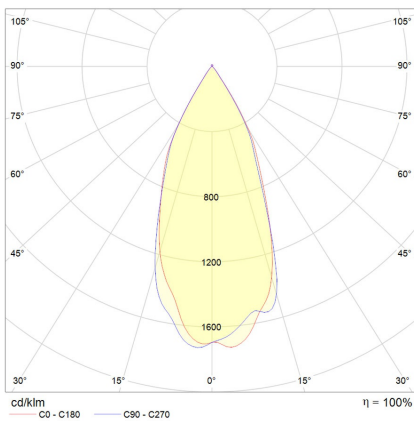

Venice Mini 20°

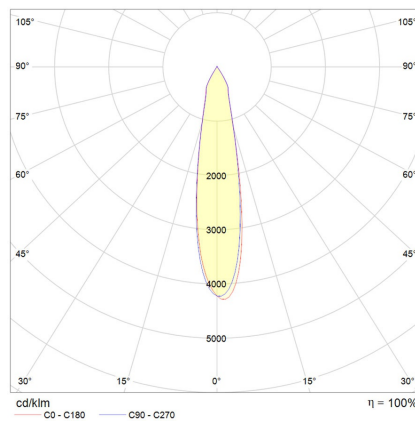

Venice Mini 14°

