



## Product Code

MD15

## Technical Description

## Two thumbs up for low glare and uniform light distribution

- Low glare design: UGR<16
- Smooth distribution with soft cut-off
- High luminous efficacy: >89 lumens per watt
- Great thermal management with a forged aluminium heat sink
- Suitable for educational facilities, offices, corridors, shopping centres and any area where uniformity is key
- Ø145mm cutout
- If you require a customised version of this product, please [contact us](#)

## Electrical Specifications


System Power	20W, 28W
Input Voltage	240V
Control Type	ON/OFF
System Efficacy (max.)	93lm/W
Power Factor	> 0.9

## Photometric Info

Luminaire Lumens	1850lm, 2500lm
CRI	CRi90
CCT	3000K
Beam Angle	15°, 24°, 40°
Lumen Maintenance	> 50, 000hrs (L70 B10)
MacAdam Step	3 Step


## Physical Characteristics

Installation Method	Fixed Recessed
Trim Finish	White
Custom Dimming Type	Available on Request
IP Rating / IK Rating	IP20
Weight	0.8Kgs
Fitting Material	Aluminium




## Polar Distribution Diagrams

Revenna 40°

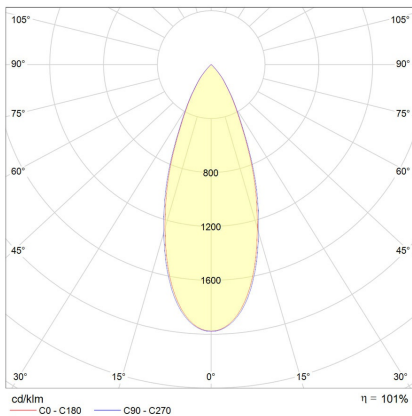

Revenna 24°

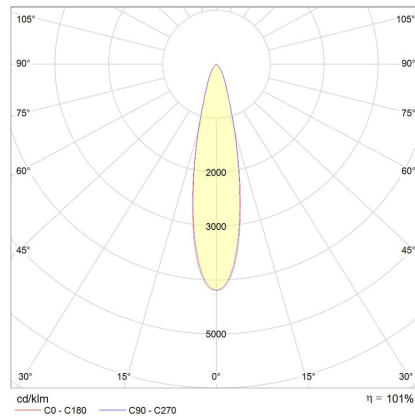

Revenna 15°

