

Malo Uno Trimless

DOWNLIGHT

Product Code

MD45



RoHS

Technical Description

Providing the architectural touch

- Available in adjustable and trimless recessed installation options
- High lumen outputs ranging from 675lm - 1830lm
- Serviceable from the front
- Low glare design
- *Electrical and Photometric data shown is for module and Individual lenses only
- If you require a customised version of this product, please [contact us](#).

Electrical Specifications

System Power	7W, 13W, 18W
Control Type	Phase-Cut Dimmable, Wireless Dimmable (Casambi), Non-Dimmable, DALI Dimmable
System Efficacy (max.)	106lm/W


Physical Characteristics

Installation Method	Adjustable Recessed, Trimless Adjustable Recessed
Trim Finish	White, Black


Photometric Info

Luminaire Lumens	675lm, 1375lm, 1830lm
CRI	CRI90, CRI97+
CCT	2700K, 3000K, 4000K, Dim To Warm
Beam Angle	15°, 30°, 50°


Malo Trimless 18W

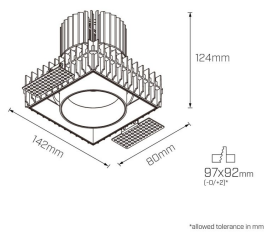

Malo Trimless 13W




Malo Trimless 7W



Polar Distribution Diagrams


*Malo 7W/13W/18W 50°

*Image depicts generic values. For specific module data, please download E3 file.

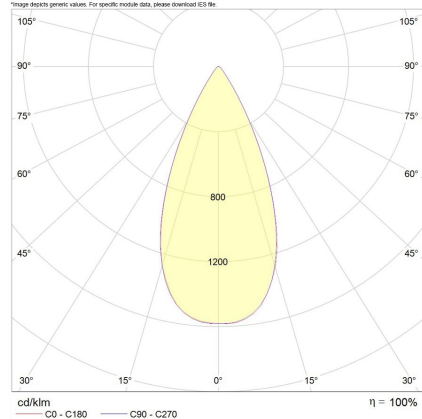


*Malo 7W/13W/18W 30°

*Image depicts generic values. For specific module data, please download E3 file.

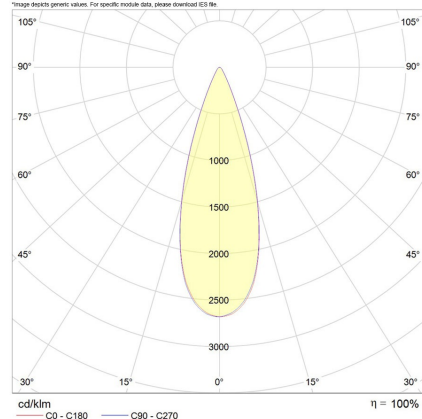

*Malo 7W/13W/18W 15°

*Image depicts generic values. For specific module data, please download E3 file.

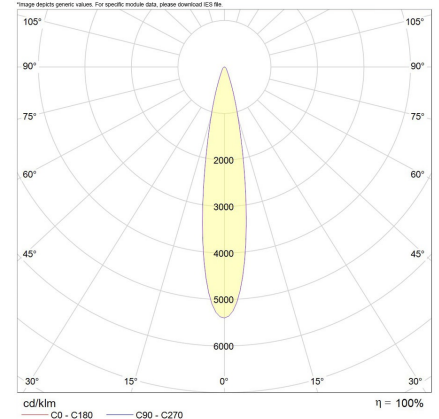

Product Accessories

Without Accessory	Deep Baffle-Diamond
Deep Baffle-Frosted	Deep Baffle-IP44
Deep Baffle-Line	Diamond Diffuser
Frosted Diffuser	Honeycomb Louvre
IP44 Diffuser	Line Diffuser