

Albi Mini Adjustable

DOWNLIGHT

Product Code

MD30



RoHS

Technical Description

Small, superior and stylish

- Available in mini, maxi, round or oval pinhole versions
- Suitable for premium hospitality and multi-residential applications
- Improved luminous efficiency with new Cross Beam Lens
- Maximum tilt angle of 26°
- *Electrical and Photometric data shown is for module and Individual lenses only
- If you require a customised version of this product, please [contact us](#).

Electrical Specifications

System Power	7W, 13W, 18W
Control Type	Wireless Dimmable (Casambi), Non-Dimmable, DALI Dimmable, Phase-Cut Dimmable
System Efficacy (max.)	106lm/W


Physical Characteristics

Installation Method	Adjustable Recessed
Trim Finish	White, Black

Photometric Info


Luminaire Lumens	1375lm, 675lm, 1830lm
CRI	CRI97+, CRI90
CCT	2700K, 3000K, 4000K, Dim To Warm
Beam Angle	15°, 30°, 50°

Albi Mini Adjustable 18W




*allowed tolerance in mm

Albi Mini Adjustable 13W



*allowed tolerance in mm

Albi Mini Adjustable 7W




*allowed tolerance in mm

Polar Distribution Diagrams


*Albi 7W/13W/18W 50°

*Image depicts generic values. For specific module data, please download EIS file.

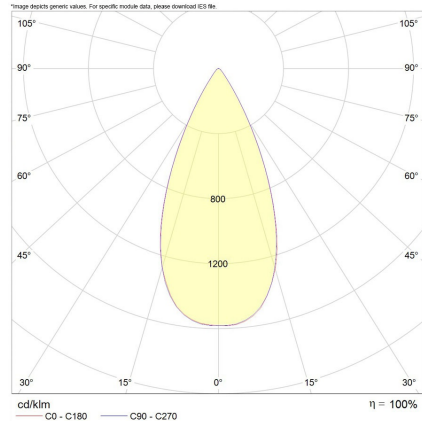


*Albi 7W/13W/18W 30°

*Image depicts generic values. For specific module data, please download EIS file.

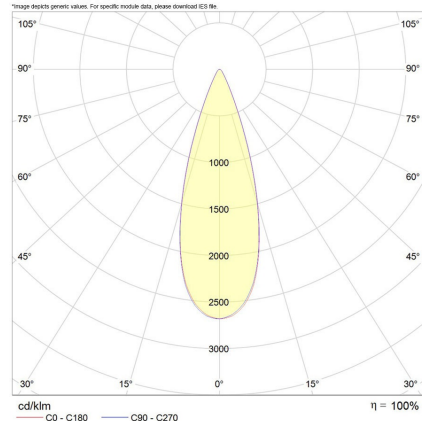

*Albi 7W/13W/18W 15°

*Image depicts generic values. For specific module data, please download EIS file.

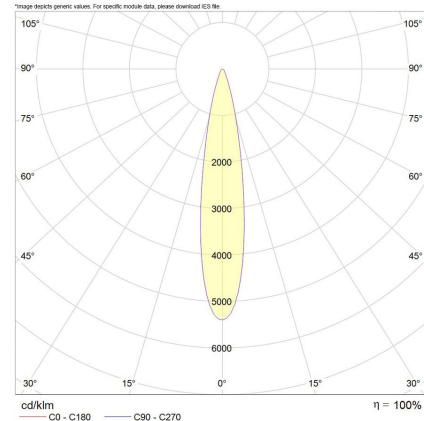

Albi Mini Adjustable

DOWNLIGHT

Product Accessories

Without Accessory	Deep Baffle
Deep Baffle-Diamond	Deep Baffle-Frosted
Deep Baffle-Honeycomb	Deep Baffle-IP44
Deep Baffle-Line	Diamond Diffuser
Frosted Diffuser	Honeycomb Louvre
IP44 Diffuser	Line Diffuser