

Albi Mini IP Fixed

DOWNLIGHT

Product Code

MD34

Technical Description

IP protection for extended usage

- IP54 rated downlight with compactly engineered design
- Beam angle options: 15°, 30°, 50°
- Dimmable Options: Phase-Cut, DALI, Casambi Wireless
- *Electrical and Photometric data shown is for module and individual lenses only
- If you require a customised version of this product, please [contact us](#)

Electrical Specifications

| | |
|------------------------|--|
| System Power | 7W, 13W, 18W |
| Control Type | Phase-Cut Dimmable, Wireless Dimmable (Casambi), Non-Dimmable, DALI Dimmable |
| System Efficacy (max.) | 106lm/W |


Physical Characteristics

| | |
|---------------------|----------------|
| Installation Method | Fixed Recessed |
| Trim Finish | White, Black |

Photometric Info

| | |
|------------------|----------------------------------|
| Luminaire Lumens | 675lm, 1375lm, 1830lm |
| CRI | CRi90, CRi97+ |
| CCT | 2700K, 3000K, 4000K, Dim To Warm |
| Beam Angle | 15°, 30°, 50° |

Albi Mini IP Fixed 18W




*allowed tolerance in mm

Albi Mini IP Fixed 13W



*allowed tolerance in mm


Albi Mini IP Fixed 7W




*allowed tolerance in mm

Polar Distribution Diagrams


*Albi 7W/13W/18W 30°

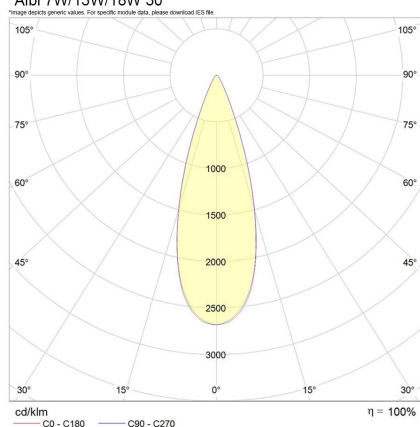

*Albi 7W/13W/18W 50°

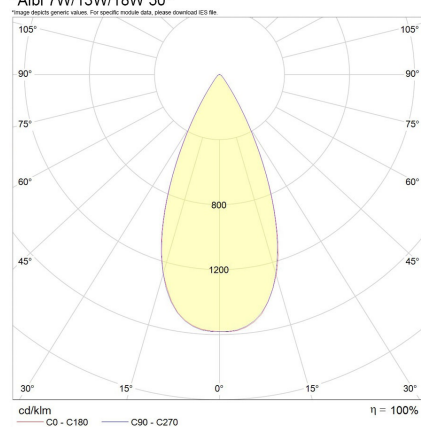

*Albi 7W/13W/18W 15°

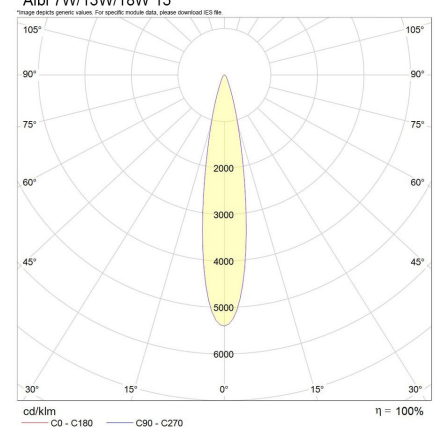

Product Accessories

| | |
|-----------------------|---------------------|
| Without Accessory | Deep Baffle |
| Deep Baffle-Diamond | Deep Baffle-Frosted |
| Deep Baffle-Honeycomb | Deep Baffle-Line |
| Diamond Diffuser | Frosted Diffuser |
| Honeycomb Louvre | Line Diffuser |