

Lucca Mini

DC LOW VOLTAGE

Product Code

MV72



RoHS

Technical Description

Mini Delight

- Compact but powerful design- 9 LED grid model
- Multiple beam angle options -15°, 24°, 36°
- Suitable for linear lighting in commercial and architectural applications
- Low unified glare rating (UGR)*
- If you require a customised version of this product, please [contact us](#)

Electrical Specifications


System Power	11W
Input Voltage	48V DC
Control Type	ON/OFF, DALI
System Efficacy (max.)	82lm/W

Physical Characteristics

Installation Method	DC-Track Recessed
Trim Finish	White, Black
IP Rating / IK Rating	IP20


Photometric Info

Luminaire Lumens	900lm
CRI	CRi90
CCT	3000K, 4000K
Beam Angle	15°, 24°, 36°




Polar Distribution Diagrams

Lucca Mini 36°

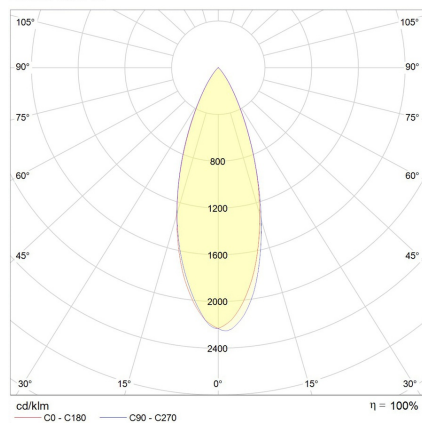

Lucca Mini 15°

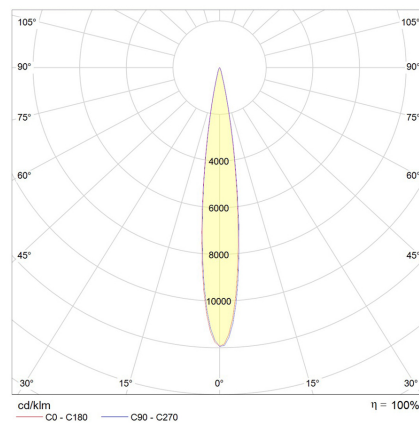

Lucca Mini 24°

