



Product Code

MH60



Technical Description

Compact and durable...


- Made with die-cast aluminium alloy housing in black powder-coat, Cosmos comes with IP65 and IK08 rating
- Allows for effortless installation with instant switch over from one Power/CCT to another
- Available in multiple beam options with quality polycarbonate lens for improved thermal performance
- Lightweight design <2.5kg with operating temperature of - of -30°C to +50°C

Electrical Specifications

System Power	80W, 100W, 120W, 150W
Input Voltage	240V
Control Type	Non-Dimmable
System Efficacy	150lm/W
Power Factor	0.9

Physical Characteristics

Installation Method	Suspended
Trim Finish	Black
Material	Aluminium
IP Rating / IK Rating	IP65
Accessories	Without Accessory
Weight	3.5Kgs

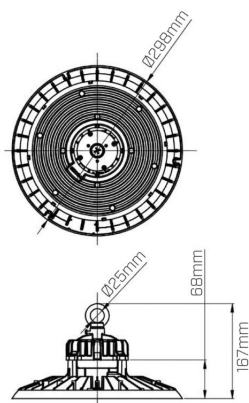


Photometric Info


Luminaire Lumens	12000lm, 15000lm, 18000lm, 22500lm
Lumen Maintenance (L70)	< 64, 000hrs/lm
MacAdam Step	< 4 Steps/lm
Colour Rendering Index (CRI)	CRI80
Colour Temperature (CCT)	3000K, 4000K, 5000K
Beam Angle	120°, 60°, 90°

Polar Distribution Diagrams

Cosmos 120°

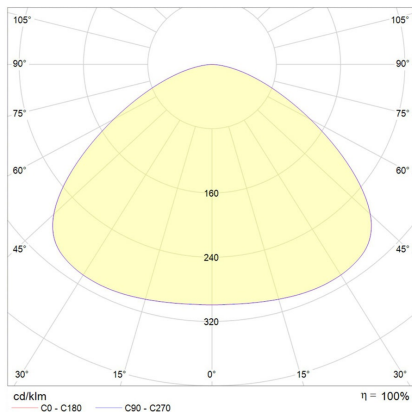

Cosmos 60°

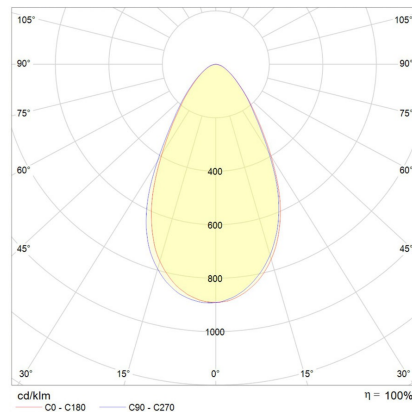

Cosmos 90°

