

Cori Mini

DOWNLIGHT

Product Code

MD58



Technical Description

Designed with configurability in mind...

- Manufactured for commercial outdoor use
- Highly efficient, robust performance
- Exceptional IP65 and IK09 ratings
- UV stabilised matte finish (Marine Grade powder coat and other finishes available on request)
- 5-year warranty*, this downlight will go the distance on your projects
- Also available in Tiny and Midi size options
- Local stock availability
- If you require a customised version of this product, please [contact us](#)

*Please see Warranty Terms & Conditions for further information.

Electrical Specifications


System Power	20W
Input Voltage	240V
Control Type	ON/OFF, DALI, Casambi
System Efficacy (max.)	83lm/W
Power Factor	> 0.9

Photometric Info

Luminaire Lumens	1650lm
CRI	CRI80
CCT	2700K, 3000K, 4000K
Beam Angle	15°, 25°, 40°
Lumen Maintenance	> 63, 200hrs (L70 B10)
MacAdam Step	3 Step


Physical Characteristics

Installation Method	Fixed Recessed
Trim Finish	White, Black
IP Rating / IK Rating	IP65

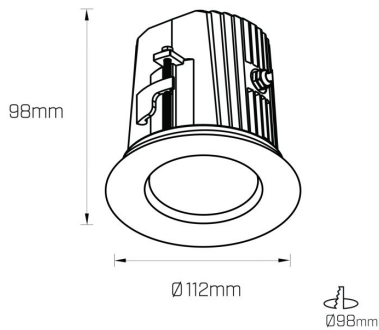


Polar Distribution Diagrams

Cori Mini 15°

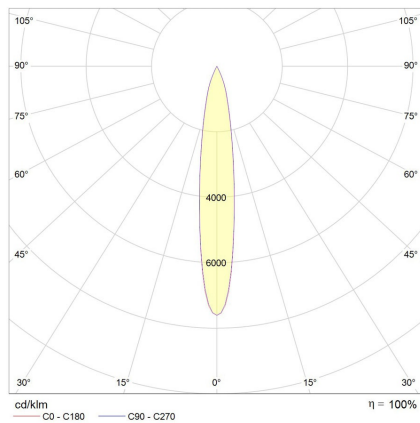

Cori Mini 25°

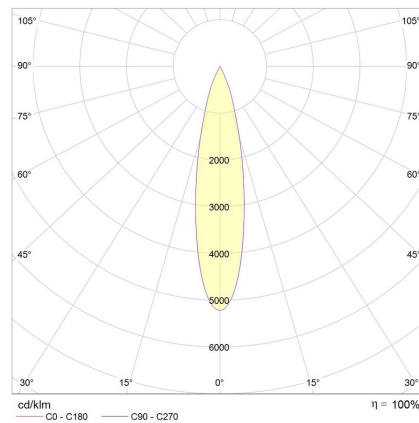

Cori Mini 40°

